

VEGATRONIC 500

INTERMITTENT VERTICAL FORM, FILL & SEAL MACHINE



MAIN FEATURES




- 1 Unbeatable entry-level design
- 2 Compact footprint
- 3 Low product drop
- 4 Easiness of use

BENEFITS

- 1 Lowest cost of ownership and lowest cost per pack
- 2 Reduced cost for floor space
- 3 Medium-high speed range applications
- 4 Fast change-over

IMA Ilapak's Vegatronic 500 is a robust, compact foot-print intermittent machine. High-quality, entry-level bagger capable to run basic pack styles with great efficiency.

TECHNICAL DATA

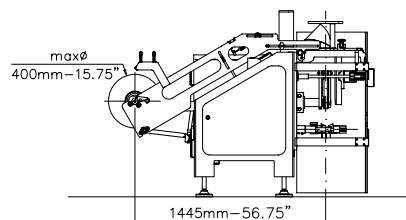

Machine Speed	100 cpm
Wrapping Materials	Heat sealable materials (laminate, co-extruded, recyclable, etc.), polyethylene
Electronic Platform	Omron PLC, Allen Bradley PLC*, Siemens PLC*
Program Memory	40 programs
HMI	Colour TFT 6" touch screen, Allen Bradley*, Siemens*
Power Requirement	AC 400 V ± 5%, 3 phase, neutral, 50/60 Hz, 6.5 kW, 9 A
Compressed Air	up to 125 l/min at 5 bar (72.5 psi), up to 225 l/min at 5 bar (72.5 psi) for LDPE
Electrical cabinet	Right-hand version, left-hand version* or remote cabinet*
Machine dimensions (W x D x H)	1136 x 2011 x 1096 mm (44.75 x 79.25 x 43.25")
Machine finishing	Electrostatic epoxy powder coating, stainless steel*
Machine Weight	600 kg (1325 lb)
BAG DIMENSIONS	
Max. width	280 mm (11"), 270 mm (11.75") for LDPE
Min. width	50 mm (2")
Max. length**	330 mm (13")
FILM REEL DIMENSIONS	
Max. width	580 mm (22.75"), 630 mm (24.75")*
Max. outer diameter	400 mm (15.75")
Core diameter	76 mm (3"), 152 mm (6")*

* optional

** greater length feasible on request